


HT72-166 (Lm)

High Efficiency Low LID and cell with Half-cut Technology

Big Size: Cell 166 × 83 mm Monocrystalline

430W / 435W

440W / 445W / 450W

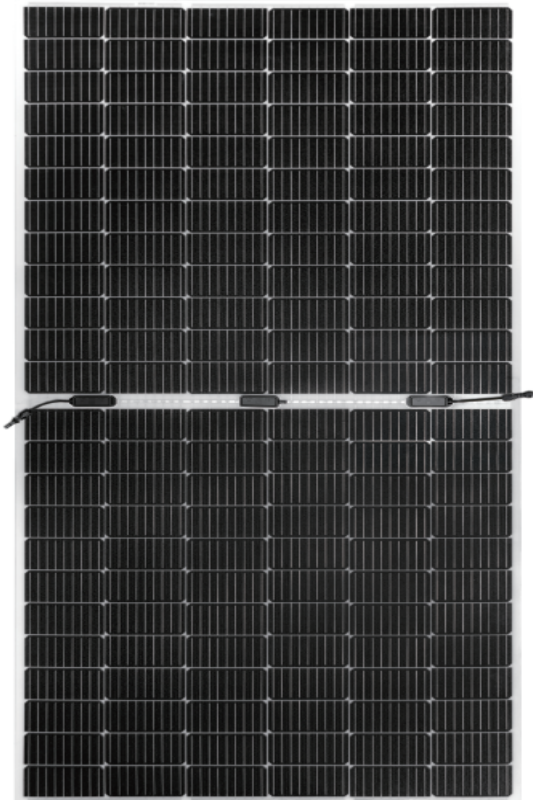

- Module Efficiency
20.6%
- No.of Cells
144(6 × 24)
- Weight
6.3Kg
- Dimensions
2105mm × 1035mm × 2mm

Fast-Installation

Through "Quick-Bonding" installation, LTF requires no penetration, reduces time on roof and saves installation costs.

Safety

Integration with underlying installation surface, ensuring the waterproof performance and safety performance of the roof.

Ultra-light

Glass free module weighs 6.3kg, 70% lighter than conventional glass modules.

Flexibility

The biggest advantage of flexible photovoltaic modules is that they can be bent and folded, which allows them to adapt to more application scenarios.

Comprehensive and First-rate Certification System

IEC61215: 2016. IEC61730: 2016 Latest Standard ISO14001 and ISO45001, meeting the highest international standards Strict quality control



Shanghai Aerospace Automobile Electromechanical Co., Ltd.

 www.htsolar.com.tr

 Turkey HT Solar Energy Joint Stock Company / Lianyungang ShenZhou New Energy Co., Ltd.

* Copyright@2022 V3 Plus Specifications are subject to change without further notification



Electrical Characteristics

Module	HT72-166 (Lm)				
Maximum Power at STC (Pmax)	430W	435W	440W	445W	450W
Open - Circuit Voltage (Voc)	49.60V	49.70V	49.80V	49.90V	50.00V
Short - Circuit Current (Isc)	11.36A	11.48A	11.60A	11.72A	11.83A
Optimum Operating Voltage (Vmp)	40.5V	40.7V	40.9V	41.0V	41.1V
Optimum Operating Current (Imp)	10.57A	10.69A	10.77A	10.86A	10.96A
Module efficiency	19.76%	19.99%	20.20%	20.40%	20.60%
Power Tolerance	0 ~ + 5W				
Maximum System Voltage	1500V DC (UL / IEC)				
Maximum Series Fuse Rating	20A				
Operating Temperature	-40 °C to +85 °C				

* STC: Irradiance 1000W/m², module temperature 25, AM=1.5
Optional black frame or white frame module according to customer requirements

NMOT


Module	HT72-166 (Lm)(Bifaciality 80±5%)				
Maximum Power	329.6W	333.9W	338.2W	342.5W	346.9W
Open - Circuit Voltage (Voc)	46.18V	46.36V	46.43V	46.61V	46.67V
Short - Circuit Current (Isc)	9.26A	9.35A	9.45A	9.54A	9.64A
Maximum Power Voltage (Vmp)	37.8V	37.9V	38.0V	38.1V	38.2V
Maximum Circuit Current (Imp)	8.72A	8.81A	8.90A	8.99A	9.08A
NMOT	45±2 °C				

* NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Solar Cells	Monocrystalline 166 × 83mm
No.of Cells	144(6 × 24)
Dimensions	2105±2mm × 1035±2mm × 2 mm
Weight	6.3kg
Frame	Framless
Junction Box	IP68
Cable	4mm ² (UL / IEC) length; 400mm (+,-) / length can be customized
Connectors	MC ₄
Packaging Configuration	46pcs / box,460pcs / 40'HQ container

Engineering Drawing

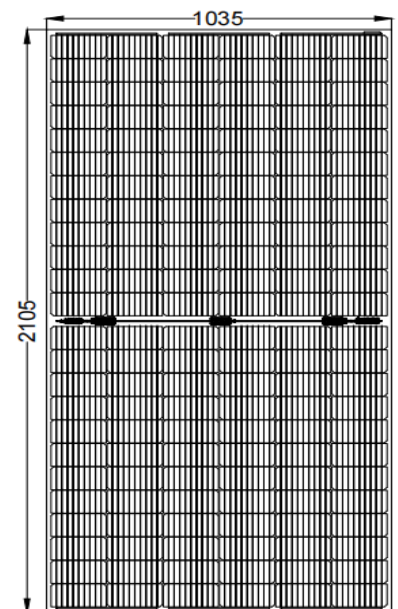

Temperature Characteristics


Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Isc	+0.041%/°C

Warranty


12 - years
product warranty

25- years
warranty on power output

Specific information is referred to
the product quality guarantee

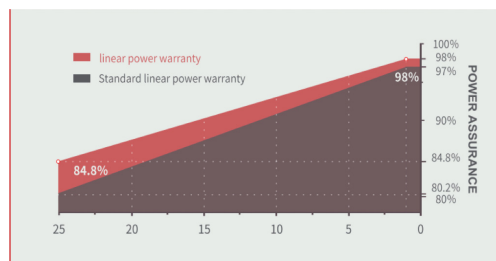

IV Curves

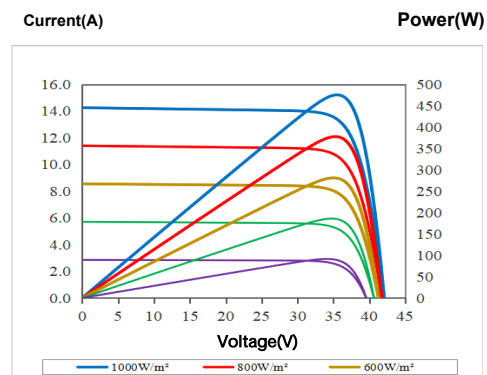

The module recycling should be carried out by the professional institutions at the end of module life cycle

